

### Specifications

#### Nominal Voltage(V)

12V

#### Nominal Capacity

20 hour rate	(1.2A	to	10.50V)	24Ah
10 hour rate	(2.28A	to	10.50V)	22.8Ah
5 hour rate	(4.08A	to	10.20V)	20.4Ah
1 C	(24A	to	9.60V)	13.6Ah
3 C	(72A	to	9.60V)	9.6Ah

#### Weight

Approx. 7.14kg(15.7Lbs.)

#### Internal Resistance (at 1KHz)

Approx. 8 mΩ

#### Maximum Discharge Current for

5 seconds: 360A

#### Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	14.4 to 15.0V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current :	7.2A
Standby use:	
Float Charging Voltage	13.5 to 13.8V
Coefficient -3.0mV/°C/cell	

#### Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

#### Charge Retention (shelf life) at 20°C(68°F)

1 month	97%
3 month	92%
6 month	85%

#### Case Material

ABS UL94 HB  
Option: Flammability resistance of (UL94 V-0)

#### Design Life

3-5 Years.

#### Terminal

F6



### Dimensions

#### Length (L)

181 ±<sup>2</sup><sub>0.04</sub> (7.13 ±<sup>0.08</sup><sub>0.04</sub>)

#### Width (W)

77.5 ±<sup>2</sup><sub>0.04</sub> (3.05 ±<sup>0.08</sup><sub>0.04</sub>)

#### Height (H)

169 ±<sup>2</sup><sub>0.04</sub> (6.65 ±<sup>0.08</sup><sub>0.04</sub>)

#### Overall Height (HT)

169 ±<sup>2</sup><sub>0.04</sub> (6.65 ±<sup>0.08</sup><sub>0.04</sub>)


Recommended torque value

M5: 4 N-m (41kgf-cm)


Maximum allowable torque value

M5: 6 N-m (61kgf-cm)


mm(inch)

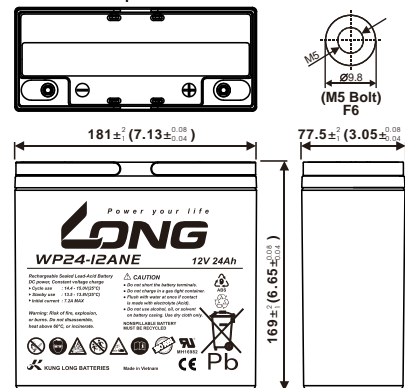


(4) Discharge Time VS. Discharge Current (25°C)

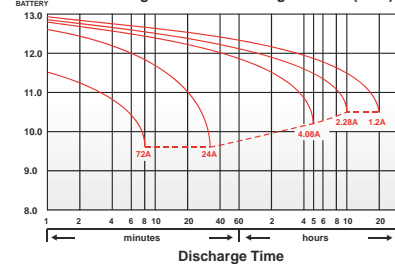


Effect of Temperature on Capacity 25°C(77°F)

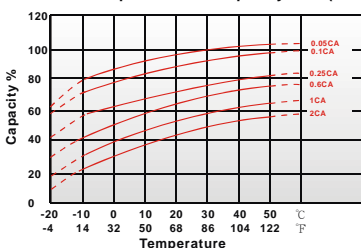


Capacity Retention Characteristic



Cycle Service Life



Trickle (or float) Service Life



050624-11